

SET UP



748

NATRIX

1ST		SPUR		2ND	
<input type="checkbox"/> 58	<input type="checkbox"/> 59	<input type="checkbox"/> 60	<input type="checkbox"/> 53	<input type="checkbox"/> 54	<input type="checkbox"/> 55

1ST		PINION		2ND			
<input type="checkbox"/> 15	<input type="checkbox"/> 16	<input type="checkbox"/> 17	<input type="checkbox"/> 18	<input type="checkbox"/> 20	<input type="checkbox"/> 21	<input type="checkbox"/> 22	<input type="checkbox"/> 23

FRONT		DRIVE TRAIN		REAR	
<input type="checkbox"/> GEAR DIFF	cst	<input type="checkbox"/> GEAR DIFF	cst		
<input type="checkbox"/> ONE WAY		<input type="checkbox"/> SOLID			
<input type="checkbox"/> SPOOL					

SHOCK ABSORBERS			
FRONT		REAR	
OIL	cst	OIL	cst
SPRINGS		SPRINGS	
<input type="radio"/> Open <input checked="" type="radio"/> Closed		<input type="radio"/> Open <input checked="" type="radio"/> Closed	


FRONT		ANTI-ROLL BARS			REAR			
<input type="checkbox"/> 1.8	<input type="checkbox"/> 2.2	<input type="checkbox"/> 2.5	<input type="checkbox"/> 2.8	<input type="checkbox"/> 1.6	<input type="checkbox"/> 1.8	<input type="checkbox"/> 2.0	<input type="checkbox"/> 2.2	<input type="checkbox"/> 2.5

FRONT		TYRES		REAR	
RIGHT	LEFT	Controlled Tyre	<input type="checkbox"/>	RIGHT	LEFT
		MAKE			
		SHORE			
		DIAMETER			
		5-MIN WEAR			

ENGINE			
ENGINE			
VERSION	HEADSHIMS	mm	
GLOWPLUG	CARB DIA	mm	
PIPE	MANIFOLD		
FUEL	NITRO	%	

CENTAX						
CLUTCHBELL	ALU	<input type="checkbox"/>	STEEL	<input type="checkbox"/>		
CLUTCHSHOE	YELLOW	<input type="checkbox"/>	RED	<input type="checkbox"/>	BLACK	<input type="checkbox"/>
CLUTCH SPRING		CLUTCH BELL GAP	mm			

AERODYNAMIC CONFIGURATION	
BODY	
BRAND	TYPE
BODY POSITION	mm
BUMPER HOLES CUT	
<input type="checkbox"/> YES	<input type="checkbox"/> NO

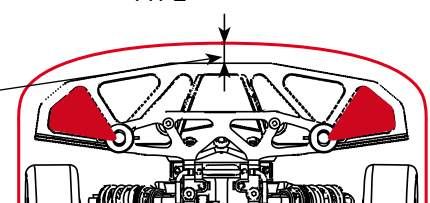

REMARKS	

RACE		DATE					
TRACK		QUALIFYING POSITION					
DRIVER		QUALIFYING TIME					
TRACTION: LOW	<input type="checkbox"/>	MEDIUM	<input type="checkbox"/>	HIGH	<input type="checkbox"/>	STARTING POSITION	
TRACK TEMP		AIR TEMP		FINAL POSITION			

